


NPS	L	d	NPT	Weight (lb)
1/4"	2.953	0.433	1/4"	0.882
3/8"	2.953	0.433	3/8"	0.882
1/2"	2.953	0.551	1/2"	0.882
3/4"	3.150	0.748	3/4"	1.058
1"	3.386	0.945	1"	1.378
1 1/4"	4.094	1.220	1 1/4"	1.918
1 1/2"	4.528	1.535	1 1/2"	3.395
2"	4.803	1.929	2"	4.861

Nominal pressure		4.0Mpa	
Test pressure	Shell test	6.0	Test medium
	Seal test	4.4	
	Gas seal test	0.6	
Applicable medium		Water, Oil, Gas	
Applicable temperature		-20~302°F	

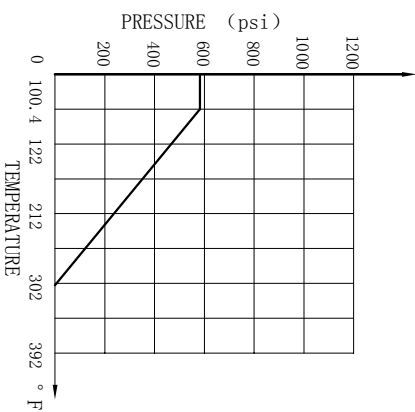

NOTE:  
 1. Design and Manufacture for valve according to ASME B16.34.  
 2. Inspection and Test for valve according to API 598.  
 3. The connection of screwed for valve according to ANSI B1.20.1.

8	NUT	-	A194 8
7	SPRING WASHER	-	304
6	HEXAGON HEAD BOLT	-	A193 B8
5	BODY	1	A351 CF8M
4	SPRING	1	SS316
3	DISC	1	A351 CF8M
2	GASKET	2	PTFE
1	BONNET	2	A351 CF8M
NO.	DESCRIPTION	Q'TY	MATERIAL
<b>ANIX®</b>			
MARK BEFORE MODIFIED		AFTER MODIFIED	
DRAW.	APP.	DATE	SCALE
CHK.	DATE		
ANIX VALVE USA		3PC ChevK Valve PN40, NPT	
CV13W6N/40			